


## LS Series Stationary Load Banks

The **LS Series** of Outdoor Stationary Load Banks are UL listed and offer the most robust, high-capacity, outdoor designs in the industry. LBD is setting the standard with intelligent operator controls, safety indication layouts, adjustable load step resolution, and ease of installation. The LS Series of Stationary products is the perfect solution for regularly scheduled testing and commissioning of mission-critical standby emergency power systems. Click on the below buttons to go to each of our 5 standard stationary sizes.

### 50 - 200 kW

#### LS50

50 kW

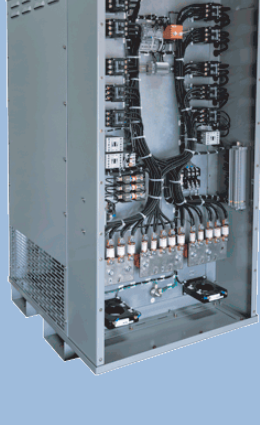


Robust, outdoor design with small form factor.

<b>Capacity:</b>	50kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS75

75 kW




Robust, outdoor design with small form factor.

<b>Capacity:</b>	75kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS100

100 kW

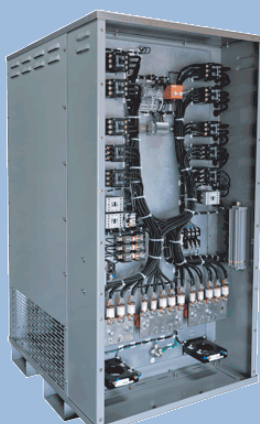


Robust, outdoor design with small form factor.

<b>Capacity:</b>	100kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS125

125 kW

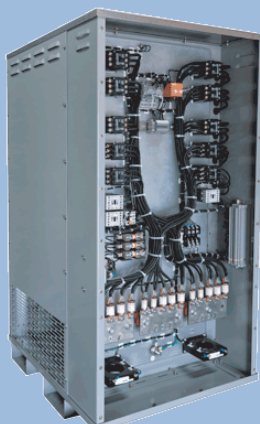

Robust, outdoor design with small form factor.

<b>Capacity:</b>	125kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS150

150 kW



Robust, outdoor design with small form factor.

<b>Capacity:</b>	150kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS200

200 kW




Robust, outdoor design with small form factor.

<b>Capacity:</b>	200kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

### 250 - 400 kW

#### LS250

250 kW

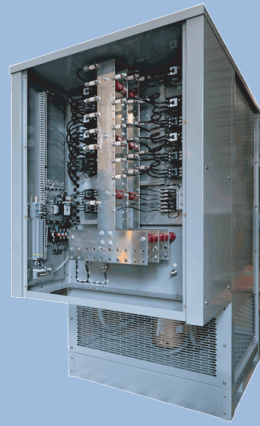


Robust, outdoor design with small form factor.

<b>Capacity:</b>	250kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS300

300 kW

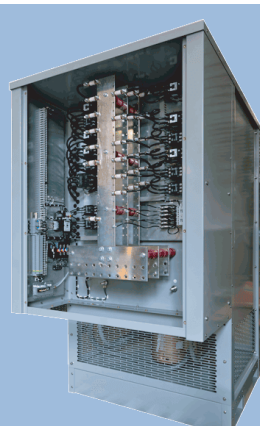


Robust, outdoor design with small form factor.

<b>Capacity:</b>	300kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS400

400 kW

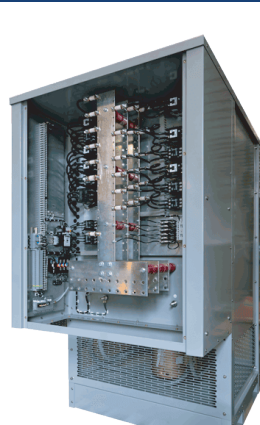


Robust, outdoor design with small form factor.

<b>Capacity:</b>	400kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

### 500 - 800 kW

#### LS500

500 kW

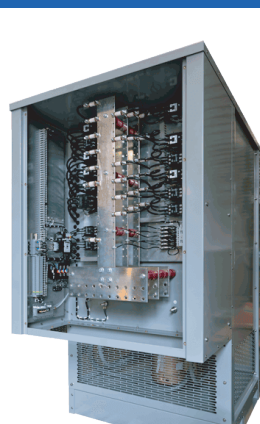


Robust, outdoor design with small form factor.

<b>Capacity:</b>	500kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Horizontal or Vertical

#### LS600

600 kW

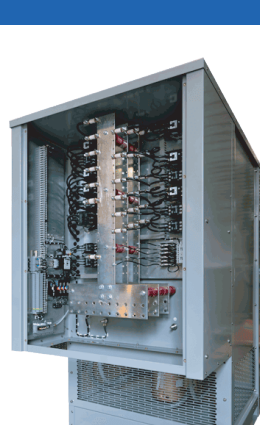


Robust, outdoor design with small form factor.

<b>Capacity:</b>	600kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Vertical

#### LS700

700 kW

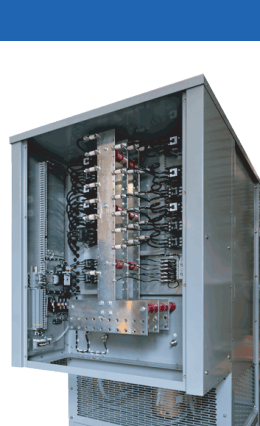


High-capacity, outdoor design with intelligent operator controls.

<b>Capacity:</b>	700kW
<b>Voltages:</b>	240/480, 480 or 600 VAC, 3-Phase
<b>Type:</b>	Resistive, 1.0 pf
<b>Frequencies:</b>	60Hz
<b>Load Resolution:</b>	10/25 kW
<b>Airflow:</b>	Vertical



LS750

750 kW

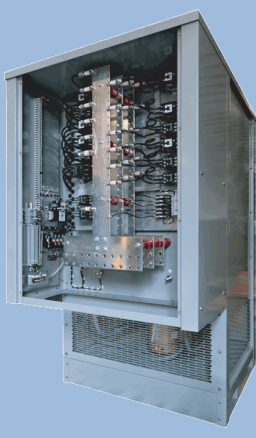


High-capacity, outdoor design with intelligent operator controls.

Capacity:	750kW
Voltages:	240/480, 480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	10/25 kW
Airflow:	Vertical

LS800

800 kW

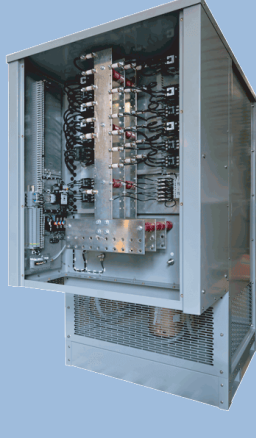

High-capacity, outdoor design with intelligent operator controls.

Capacity:	800kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	10/25 kW
Airflow:	Vertical

900 - 1250 kW

LS900

900 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	900kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	10/25 kW
Airflow:	Vertical

LS1000

1000 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	1000kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	10/25 kW
Airflow:	Vertical

LS1100

1100 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	1100kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	10/25 kW
Airflow:	Vertical

LS1200

1200 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	1200kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical

LS1250

1250 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	1250kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical

1500 - 2500 kW

LS1500

1500 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	1500kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical

LS2000

2000 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	2000kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical

LS2400

2400 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	2400kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical

LS2500

2500 kW



High-capacity, outdoor design with intelligent operator controls.

Capacity:	2500kW
Voltages:	480 or 600 VAC, 3-Phase
Type:	Resistive, 1.0 pf
Frequencies:	60Hz
Load Resolution:	25 kW
Airflow:	Vertical